

35mm Cm GUIDELINES:

A 35mm CAMERA OFFERING POINT & SHOOT CONVENIENCE ON ALL MODEL LINES.


BASIC FEATURES

Cm MUST BE CAPABLE OF:

1. AUTO FOCUSING - WITH A 35mm TO 50mm LENS (FOCUS PRECISION BECOMES MORE CRITICAL W/ LONGER LENSES). 3 ZONE AF FOCUSING TO 18" - TWO STAGE SHUTTER RELEASE ALLOWING FOCUS TO BE LOCKED IN FOR RECOMPOSITION.
2. (NIKON) AUTO FLASH - FLASH IS FIRED AUTOMATICALLY WHEN NEEDED DETERMINED BY PROGRAMMED EXPOSURE SYSTEM. FLASH COUPLED TO AF SYSTEM TO DETERMINE EXP.
- 2A. LITHIUM POWER SOURCE FOR FLASH ON DEMAND. (OLYMPUS) (IF POSSIBLE USER REPLACEABLE)
3. DX CODING SYSTEM UTILIZATION - FILM SPEED (ASA) AUTOMATICALLY SET WHEN FILM IS LOADED. OTHER BENEFITS OF DX ARE: (A) DIGITAL FR COUNTER, SHOWING EITHER # FR'S REMAINING OR NORMAL FR #'S. FRAME COUNTER COULD BE VF DISPLAYED (DX PROVIDES INFO AS TO # FR'S / ROLL), (B) FILM LATITUDE COULD BE PROGRAMMED IN.
4. VF RETICLE W/ PARALLAX MARKINGS
5. SELF TIMER - AUDIO-VISUAL TYPE (OLYMPUS) (DISC 8000)
6. TRIPOD SOCKET
7. INTEGRAL LENS COVER (PENTAX) - (CHINON) W/ FLASH FOR LENS-FI SEPAR
8. FILM WINDOW IN-FILM DOOR,

ADDITIONAL FEATURES FOR TOP OF LINE MODEL.

1. AUTO - FILM LOAD , ADVANCE TO FR 1 , REWIND AFTER LAST EXPOSURE. (SEPARATE WINDER UNIT IS A POSSIBILITY)
2. 4 ZONE LCD FOCUS INDICATOR IN VF . SYMBOL LIGHTS TO INDICATE APPROX. FOCUS ZONE. (RICOH)

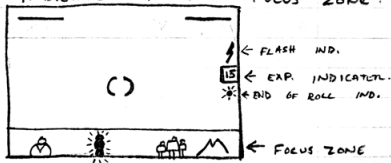

3. DIGITAL (LCD) FR. COUNTER IN VF INDICATES EXP. REMAINING.
4. INTEGRAL LENS COVER W/ FLASH (CHINON) OPENING WHEN SHUTTER TOUCHED.
5. LCD DAY, DATE, TIME IMPRINTER BUILT INTO FILM DOOR (CHINON)
6. BACKLIGHT COMPENSATOR (1.5 STOPS)
7. RUBBERIZED COATING , HEAVY TEXTURE GRIP
8. END OF ROLL LED

SUMMARY

35mm cm. FEATURES



BASIC






1. AUTO FOCUS
2. AUTO FLASH (DECISION) AF COUPLED.
3. LITHIUM POWER SUPPLY
4. DX CODING - SET ASA AUTOMATICALLY
5. VF RETICLE
6. AUDIO VISUAL SELF TIMER.
7. INTEGRAL LENS COVER
8. TRIPOD SOCKET
9. FILM WINDOW IN FILM DOOR.
10. EASY FILM LOAD
11. RUBBERIZED COATING, HEAVY TEXTURE GRIP

EXTRAS

1. AUTO ADVANCE & LOAD & (REWIND)? (POSSIBLE TO SELL UNDER UNIT AS ADD ON)
2. 4 ZONE VF FOCUS INDICATOR (LCD)
3. DIGITAL (LCD) FRAME COUNTER. (VF DISPLAYED)
4. INTEGRAL LENS COVER - FLASH UNIT OPENING w/ SHUTTER TOUCH COVER HELPS DISPLACE FLASH FROM LENS,
5. OPTIONAL (LCD) DAY, DATE, TIME IMPRINTER IN FILM DOOR (AS ADD ON)
6. BACKLIGHT COMPENSATOR.
7. END OF ROLL OR NO FILM INDICATOR (RED LED IN VF)

35mm Half-frame Camera

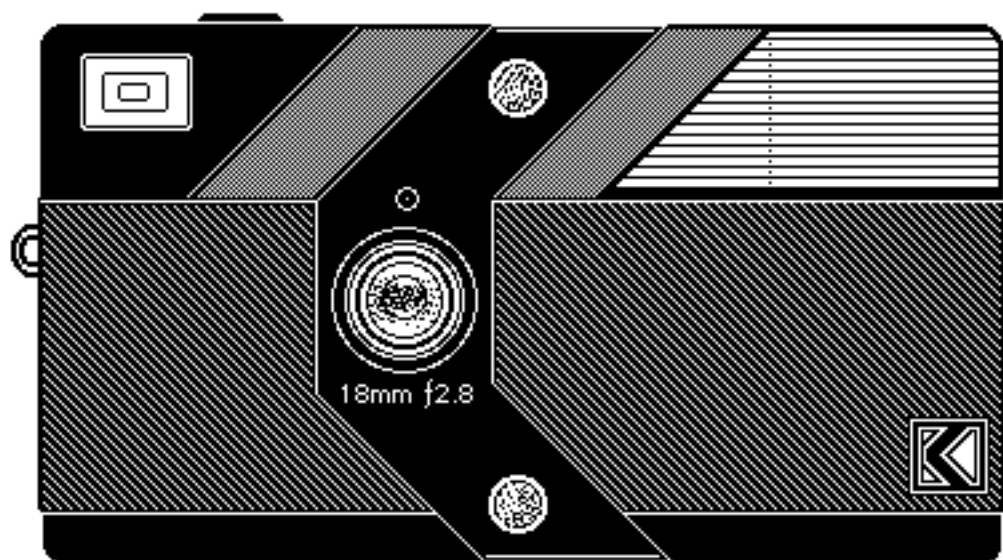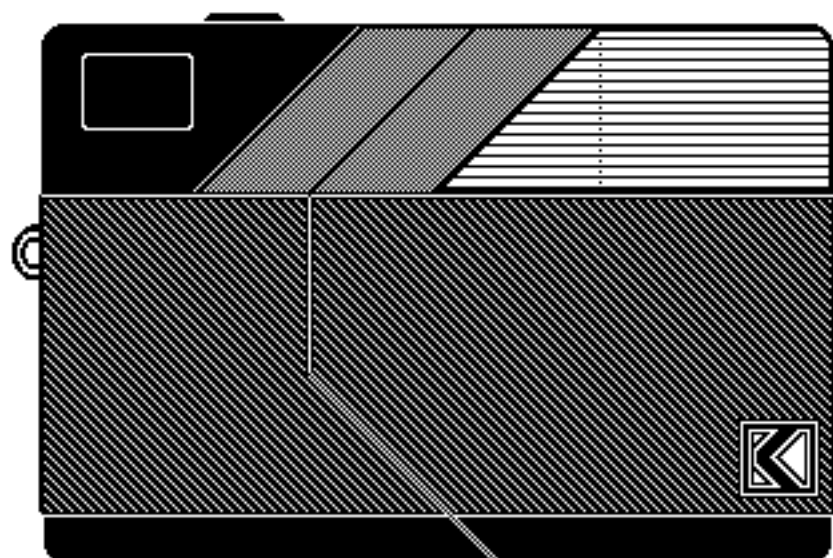

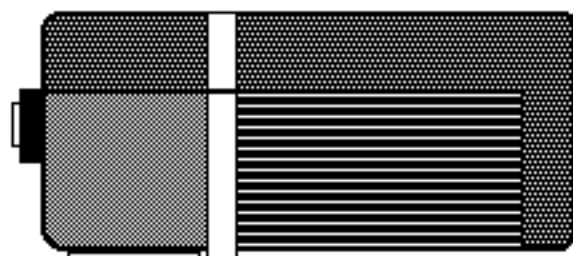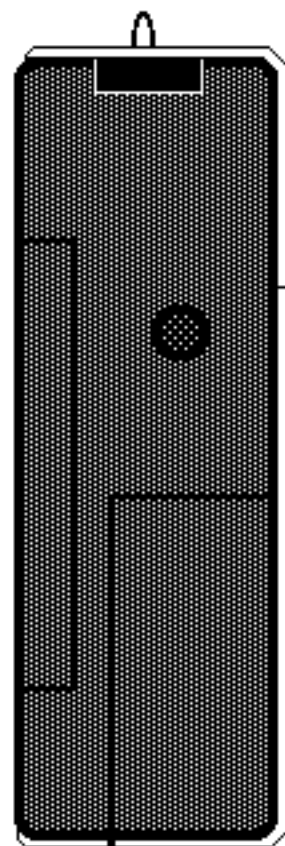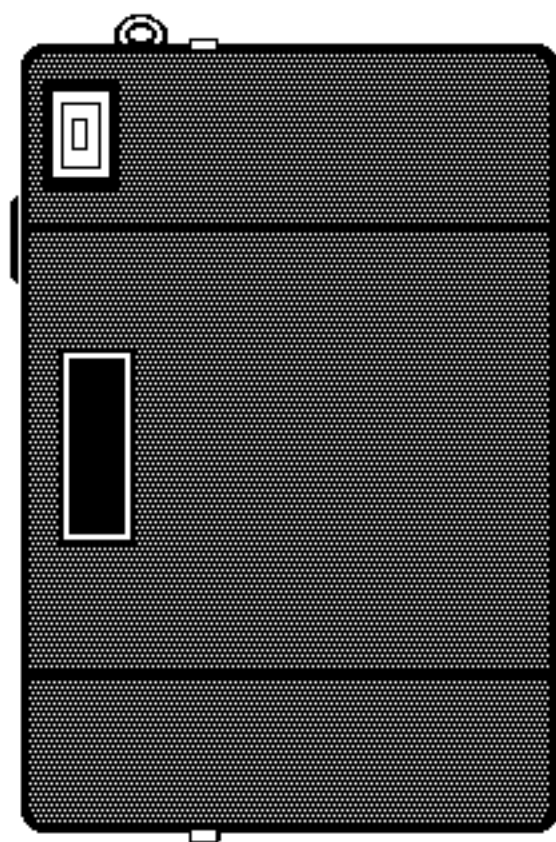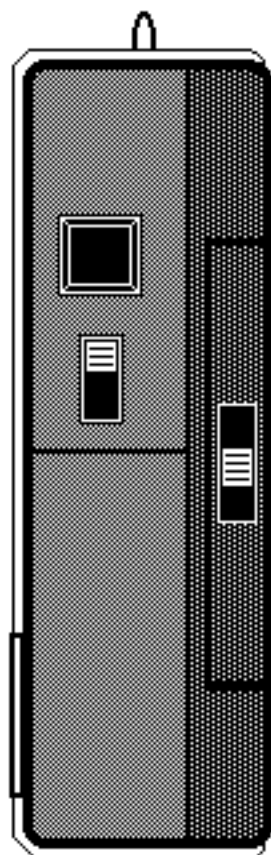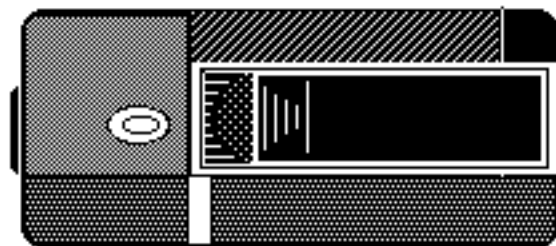


AF/2 35mm Half-frame Auto focus Camera

FEATURES

1. Extremely compact size.
2. Horizontal half-frame format - 18mm X 24mm.
3. 3 Zone Auto Focus with focus lock and 3 zone indicators in VF.
4. Auto Flash with Lithium battery for fast recycle time.
5. DX film coding utilization for ASA and frame counter settings.
6. LCD countdown frame counter in viewfinder.
7. Integral lens cover/flash extender.
8. Pre-winding film advance-film is wound to take-up spool when loaded then advanced back into cartridge-prevents accidental fogging of exposed frames if film back is accidentally opened.
9. Tripod socket.
10. Self-timer.

LCD Frame Counter

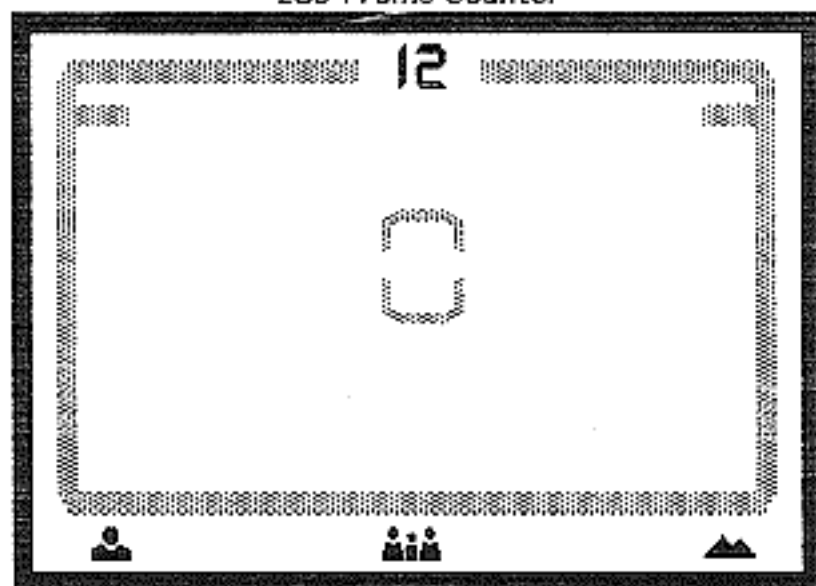

LED Auto Focus Indicators